


PLASTIC CABLE GLAND

Supplied complete with locknut

IP68 Protection at 10 bar (145 psi)

102 metres submersible

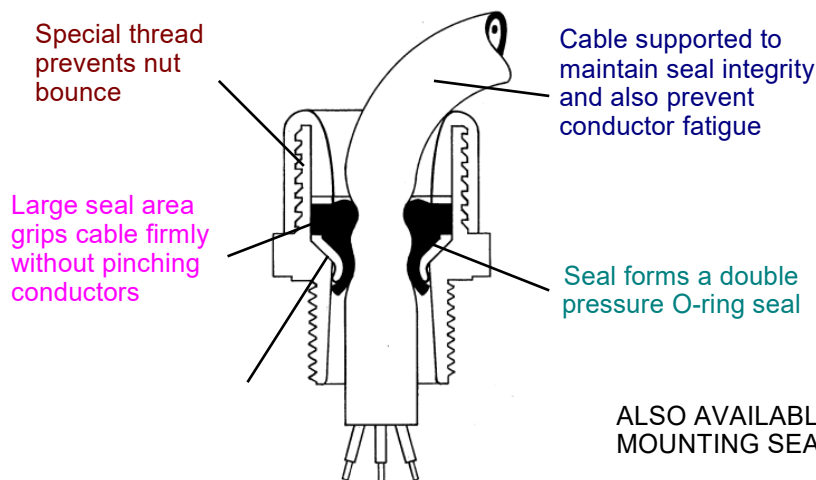

ALSO AVAILABLE WITH WAVE SEAL™ IP 68 SURFACE MOUNTING SEALING WASHER

Patented Internationally

TECHNICAL DATA

Cat No.	Thread size	Thread length		Cable Range OD	Pack size
GMIL12	M12 x 1.5	10	16	2.5 - 6	50
GMIL16	M16 x 1.5	15	22	4.5 - 9	50
GMIL20	M20 x 1.5	15	27	7.5 - 13.2	50
GMIL25	M25 x 1.5	15	32	13 - 18	25
GMIL32	M32 x 1.5	15	46	17.5 - 25	20

Material: Nylon
Colour: Black or Grey
Working temp: -40°C to 100°C
 Short term 130°C

UV Stabilisation: Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C

Chemical resistance: Excellent resistance to oils, petrol, alcohols, seawater, caustic soda, weak acids, alkalis, bases and salts.